



Drilling pattern

Type: STR-80 Version: 2021/1

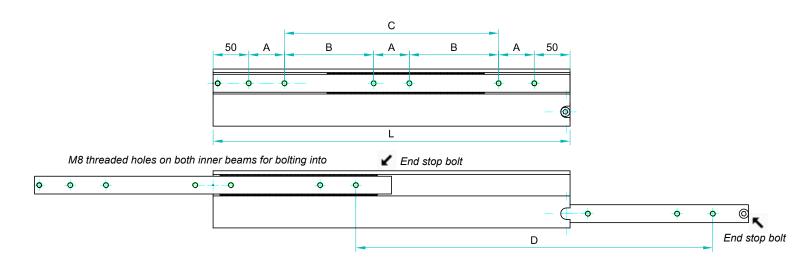

STR-80 weighs 8.19 kg/m. Sold as singles

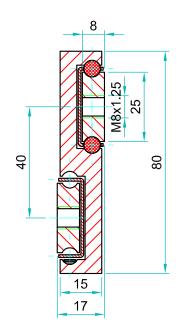

Part Number	Closed Length: L	Extension Length: D	Load per pair: kg	"A"	"B"	"C"
4015.STR080.0200	200	200	170	50	-	-
4015.STR080.0250	250	250	190	50	-	50
4015.STR080.0300	300	300	220	50	-	100
4015.STR080.0350	350	350	240	50	-	150
4015.STR080.0400	400	400	260	50	-	200
4015.STR080.0450	450	450	280	50	-	250
4015.STR080.0500	500	500	290	50	-	300
4015.STR080.0550	550	550	300	50	150	-
4015.STR080.0600	600	600	285	50	175	-
4015.STR080.0650	650	650	270	50	200	-
4015.STR080.0700	700	700	260	50	225	-
4015.STR080.0750	750	750	250	50	250	-
4015.STR080.0800	800	800	240	50	275	-
4015.STR080.0850	850	850	230	50	300	-
4015.STR080.0900	900	900	220	50	325	-
4015.STR080.0950	950	950	210	50	350	-
4015.STR080.1000	1000	1000	200	50	375	-
4015.STR080.1050	1050	1050	190	50	400	-
4015.STR080.1100	1100	1100	180	50	425	-
4015.STR080.1150	1150	1150	170	50	450	-
4015.STR080.1200	1200	1200	160	50	475	-
4015.STR080.1250	1250	1250	140	50	500	-
4015.STR080.1300	1300	1300	130	50	525	-
4015.STR080.1350	1350	1350	120	50	550	-
4015.STR080.1400	1400	1400	110	50	575	-
4015.STR080.1450	1450	1450	100	50	600	-
4015.STR080.1500	1500	1500	90	50	625	-
4015.STR080.1550	1550	1550	80	50	650	-
4015.STR080.1600	1600	1600	60	50	675	-









Type: STR-80 Version: 2021/1



Material: All steel parts/no plastics

Beams: Cold drawn carbon steel C45E+C. EN 10277 milled raceways

Ball bearings: Chromed steel C85, G100. Din 5401 **Ball cages:** Zinc plated sheet steel. Laser cut profiles

End bolts: Steel ASTM A307

Surface Protection: Electrolytic alkaline zinc coating (10-12 microns). conforming to DIN EN ISO 9227 neutral salt spray testing. No white rust appearance within 120 hours. No

red rust within 1,032 hours

Temperature range: Steel slides –20°C to +250°C provided the necessary lubricants are

applied and the beams are mounted freely to allow expansion

Lubrication: We apply and recommend lithium based EP3 grease for general

applications. High & low temp grease upon request **Thread pitches:** As per end profile image - coarse

Options:

'F' - One mounting beam countersunk

'FF' - Both beams countersunk

'SB' - Stainless steel 316L ball bearings

'SC' - Stainless steel ball cages

'SA' - Stainless end bolts & retaining pins

Bespoke length, drilling pattern & extension on request



Do not dismantle the slide!

The maximum safe working load is stated for a fully extended pair of slides, mounted upright. Use all fixing holes and spread the load evenly across the inner beam.

Flat mounting: Reduce the load by 60-80%. We recommend the use of strong L brackets for under or floor mount.

Deflection is calculated at approx 1% of the closed length, at or near full load capacity.

If mounting on the indirect axis, flat, as in the image above, reduce the load capacity by 60-80% and allow for increased deflection, or contact our engineers to request accurate FEA load analysis for OEM projects. We load rate per fully extended pair of slides on the direct axis, upright, with uniform loading across the beams. If load capacities need to be increased, please contact us for technical advice.





